

DRAKKAR



WALL COVERING



2022

CONTACT



+33 (0)545 978 272
DRAKKARBOIS@GMAIL.COM
www.drakkarbois.com


DRAKKAR

Avant la 1ère Guerre Mondiale déjà, les rues de Paris, Londres ou New York étaient pavées de bois de bout du fait de sa résistance exceptionnelle à l'usure, à l'abrasion et au poinçonnement. Ses qualités incomparables lui ont permis de résister à l'épreuve du temps.

LA NAISSANCE D'UNE PASSION...

A la genèse de DRAKKAR, nous avons exploré l'improbable bois de bout. Nous avons mis au point ce concept révolutionnaire des Pavés de Paris, qui permet enfin d'offrir le décor et la robustesse du bois de bout au monde de la décoration.

Il nous a fallu plonger dans les logiques ancestrales et mettre au point de nouveaux savoir-faire pour appréhender les fluctuations dimensionnelles du bois de bout, et ainsi offrir le fleuron des revêtements de sol, alliant la chaleur du bois et la dureté de la pierre.

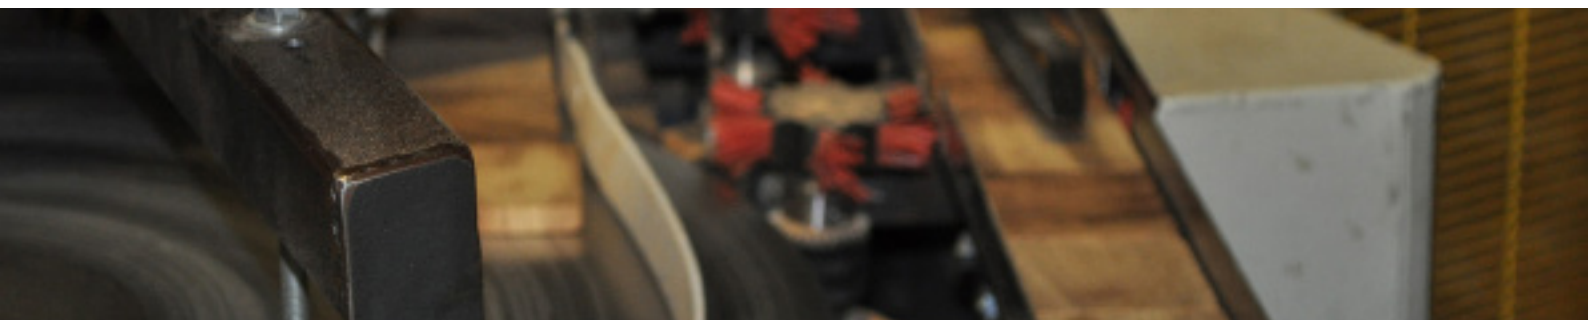

SUMMARY

END-GRAIN 3D	PAGE 3
REFUGE	PAGE 5
CHALET	PAGE 7
METRO	PAGE 9
MAINTENANCE ET ACCESSORIES	PAGE 11
SAMPLES	PAGE 27




MULTIDEPTH END-GRAIN



TECHNICAL SHEET

ASPECT

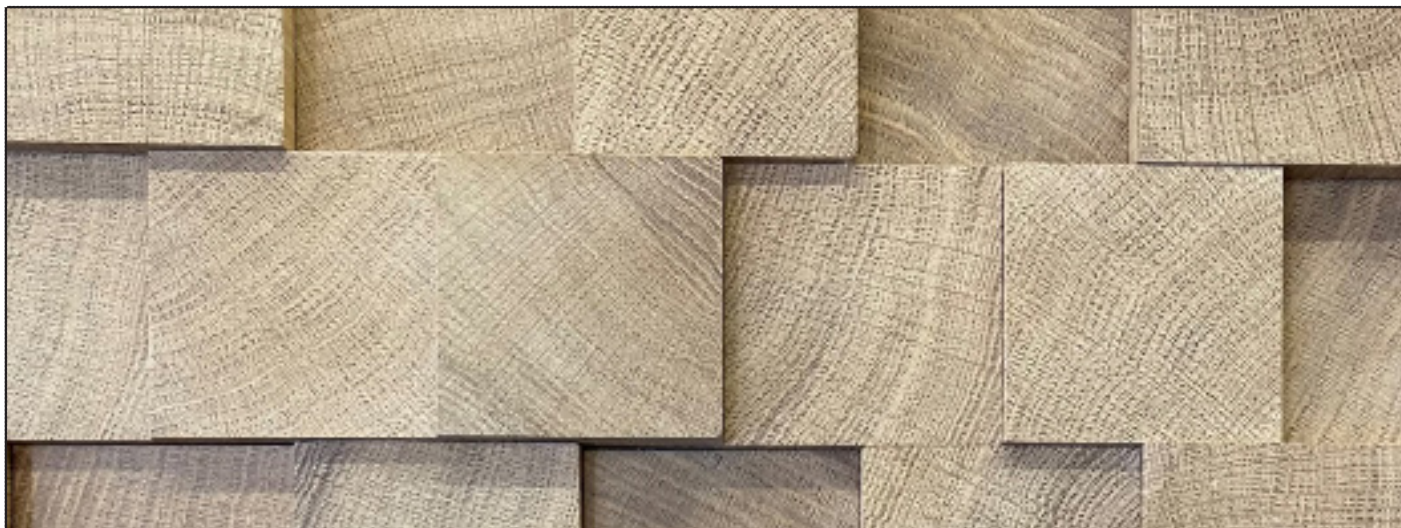

RANDOM THICKNESS

DESCRIPTION

Panel of 21 end-grain wood pavers on a polyethylene underlay

DIMENSIONS

Panel : 200mm X 525mm

Woodblock : 70mm x 70mm x 7/10/14/18/22mm

FINISH

Unfinished or oiled (color of your choice)

PACKING

10 panels per boxe (1,029m²) weight 15kg

Up to 49 boxes per pallets (L=80cm x l=120cm x h=190cm) weight 750kg around

MULTIDEPTH END-GRAIN

REFERENCE	SPECIES	ASPECT	FINISH	€ HT/SQM
MUR3DCHE00	OAK	RELIEF	UNFINISHED	442.80
MUR3DCHEXX	OAK	RELIEF	OILED (COLOR OF YOUR CHOICE)	457.30

REFUGE



TECHNICAL SHEET

ASPECT



IRREGULAR SQUARE

DESCRIPTION

Split oak wood blocks


DIMENSIONS

100x100mm or 70x70mm / thickness variable

FINISH

Unfinished or oiled (color of your choice)

COLORING

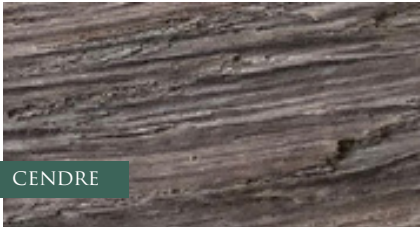


CENDRE



CHÊNE VIEILLI




GRIS LIN

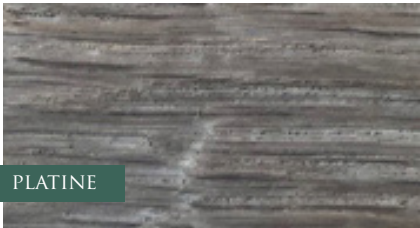

PLATINE



ROCHE ALPINE

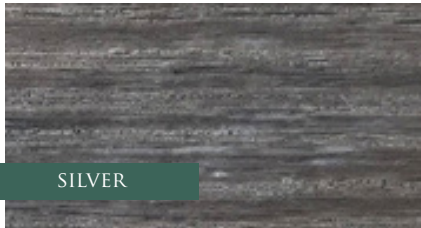


SILVER



TERRE FUMÉE



VIEUX PIN

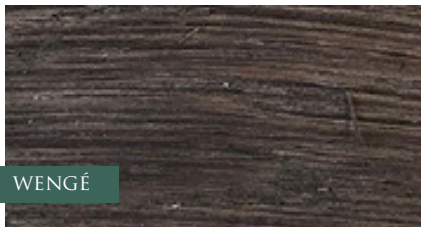

WENGÉ

REFUGE


REFERENCE	SPECIES	ASPECT	FINISH	€/SQM
MURREFCHE00	OAK	IRREGULAR	UNFINISHED	140.00
MURREFCHEXX	OAK	IRREGULAR	OILED (COLOR OF YOUR CHOICE)	148.10

CHALET



TECHNICAL SHEET

ASPECT

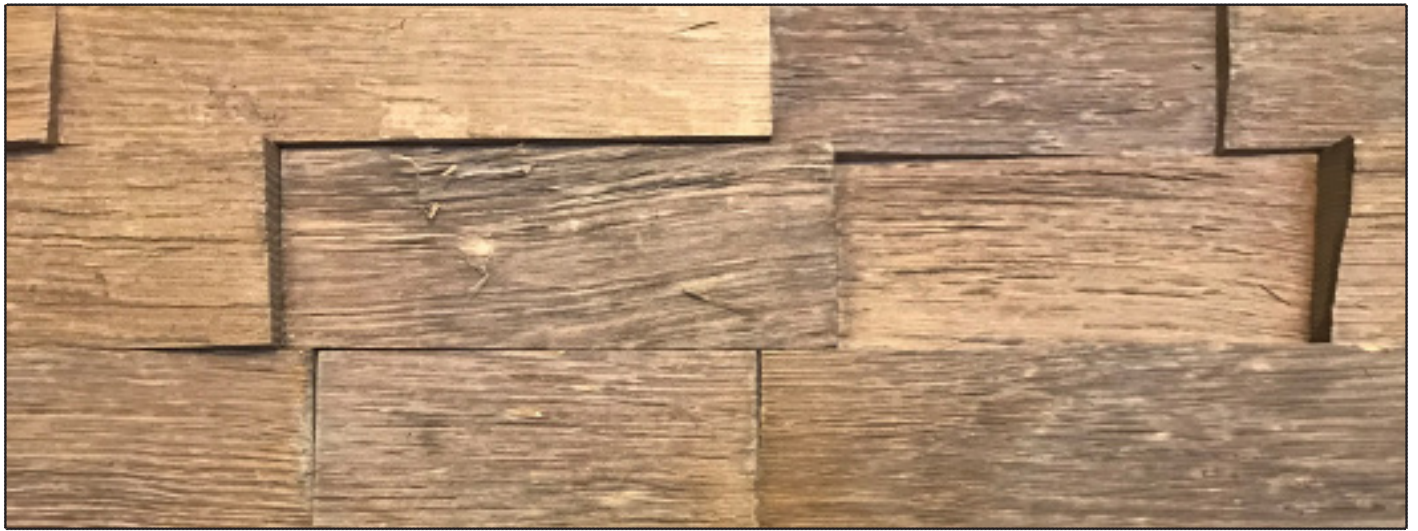

IRREGULAR RECTANGLE

DESCRIPTION

Split Oak


DIMENSIONS

70mm/ lenght and thickness variable

FINISH

Unfinished or oiled (color of your choice)

COLORING

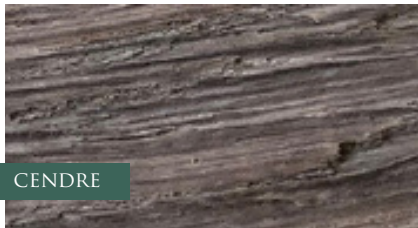


CENDRE




CHÊNE VIEILLI




GRIS LIN

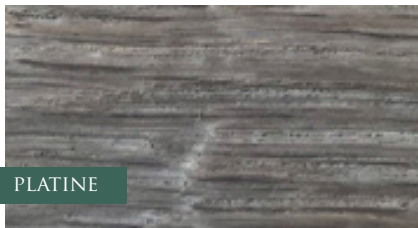


PLATINE

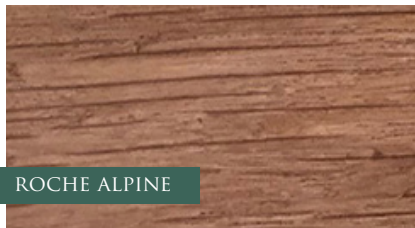

ROCHE ALPINE

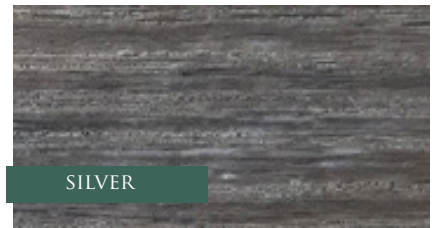


SILVER

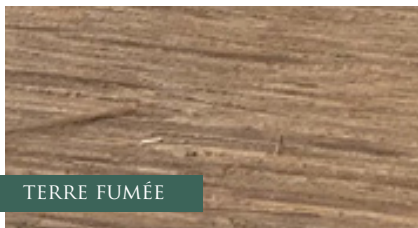

TERRE FUMÉE



VIEUX PIN

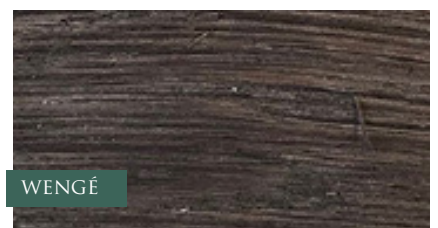

WENGÉ

CHALET

REFERENCE	SPECIES	ASPECT	FINISH	€ HT/SQM
MURCHACHE00	OAK	IRREGULAR	UNFINISHED	148.10
MURCHACHEXX	OAK	IRREGULAR	OILED	157.50

M É T R O



TECHNICAL SHEET

SPECIES



OAK



POPLAR



PINE

DESCRIPTION

Individual beveled wood block type Parisian metro

DIMENSIONS

Woodblock : 75mm X 150mm / thickness=15mm

FINISH

Unfinished or oiled (color of your choice)

MÉTRO

REFERENCE	SPECIES	ASPECT	FINISH	€/SQM
MURMBASCHE00	OAK	TYPE FAÏENCE	UNFINISHED	91.90
MURMBASCHEXX	OAK	TYPE FAÏENCE	OILED	97.20
MURMODEPEU00	POPLAR	TYPE FAÏENCE	UNFINISHED	57.80
MURMODEPEUXX	POPLAR	TYPE FAÏENCE	OILED	63.60
MURMODPICPIN00	PINE	TYPE FAÏENCE	UNFINISHED	57.80
MURMODPIGPINXX	PINE	TYPE FAÏENCE	OILED	63.60

MAINTENANCE A



ND ACCESSORIES



PREPARATION



Tannin Remover removes tannin stains that may appear over time.

- ready to use
- colorless
- can be used without water
- can be used on untreated wood tannic, oiled or waxed

USER INSTRUCTIONS:

- spray Tannin Remover on the task to be treated and leave to act for a few minutes. retirez la tâche a traiter avec un chiffon humide
- for stubborn stains, repeat the process until you get the desired result.
- let the treated surface dry completely. If the protection is damaged; treat the surface again with the initial finish.

To be used only on tannic woods

To be used only in local application

Do not leave a cloth soaked in product on the treated surface to avoid streaks

The product can be stored for 24 months in a dry environment and in its original packaging. Protect from frost and moisture.

PACKAGING

500 ML

TANNIN REMOVER

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTTAN500ML	TANNIN REMOVER	500ML	12.10

GAP FILLING



Woodfiller est un mastic bois en poudre disponible en trois teintes. Used indoors, this wood filler is very easy to sand and is free from shrinkage on drying. 100% compatible with our oils..

- withdrawal free
- ecological
- excellent color support
- easy to sand
- fast hardening

USER INSTRUCTIONS :

- apply to a clean, dry surface
- Mix 5 parts Woodfiller with 2 parts water to form a paste. Once the mixture is made, the product can be used for 30 minutes at a temperature of 20 ° C.
- can be sanded after approx. 2 hours at 20 ° C at 40% relative humidity.
- may be a little rounded during drying

Always use a stainless steel tool

Apply Woodfiller in the interstices before the final sanding in order to have an even surface finish.

Define the correct product color in correlation with the color of the wood.

The product can be stored for 24 months in a dry environment and in its original packaging. Protect from frost and moisture.

PACKAGING:

- 500 GRAMMES
- 5 WEIGHT

WOOD FILLER

REFERENCE	DESCRIPTION	COLOR	CAPACITY	€/PIECE
WOODFQDARUB500 WOODFQDARUB5000	WOOD FILLER	LIGHT	500G 5KG	21.30 171.00
WOODFQMERUB500 WOODFQMERB5000	WOOD FILLER	MEDIUM	500G 5KG	21.30 171.00
WOODFQLIRUB500 WOODFQLIRUB5000	WOOD FILLER	LIGHT	500G 5KG	21.30 171.00

FINISH OIL



Ecological monocoat oil with molecular link or finishing and treating interior woods












Perfect for high traffic areas, stairs, working surface and furniture



USER INSTRUCTIONS :

- Apply on unfinished wood, clean and sane, free from other finishes. After sanding the surface properly, vacuum carefully. Dust the surface. This step is mandatory for a good hold of the finish.
- Using a blender, stir the oil well to homogenize the pigments. In a bucket, the oil and the hardener, respecting a ratio of 3 volumes of oil to 1 volume of hardener. Stir for 1 to 2 minutes.
- Apply a small amount using a sponge or a polyshin machin. Work in areas of 5 to 10 m2. Leave on for a few minutes.
- Wipe off excess carefully with a cloth or a polyshin machin. The surface should be dry to the touch after wiping.

COLORING:



CONSUMPTION : 30 TO 50M² PER LITER

PACKAGING :

- DUO BOXES OF 350 ML :RMC OIL PLUS 2C 275 ML + RMC ACCELERATOR 75 ML
- DUO BOXES OF 1.3 L :RMC Oil Plus 2C 1 L + RMC ACCELERATOR 0.3 L
- DUO BOXES OF 3.5 L :RMC OIL PLUS 2C 2.750 L + RMC ACCELERATOR 0.750 L

FINISHING OIL PRICE LIST

OIL

REFERENCE	DESCRIPTION	COLOR	CAPACITY	€/PIECE
ENTHUIPIG35006 ENTHUIPIG130006 ENTHUIPIG350006	OILED	ACAJOU	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35014 ENTHUIPIG130014 ENTHUIPIG350014	OILED	BÉTON	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35017 ENTHUIPIG130017 ENTHUIPIG350017	OILED	BLANC	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35018 ENTHUIPIG130018 ENTHUIPIG350018	OILED	BLANC CÉRUSÉ	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35005 ENTHUIPIG130005 ENTHUIPIG350005	OILED	BOURBON	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35011 ENTHUIPIG130011 ENTHUIPIG350011	OILED	CHOCOLAT	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35012 ENTHUIPIG130012 ENTHUIPIG350012	OILED	CIRÉ FUMÉ	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35007 ENTHUIPIG130007 ENTHUIPIG350007	OILED	DÉSIR	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35004 ENTHUIPIG130004 ENTHUIPIG350004	OILED	DORÉ	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35013 ENTHUIPIG130013 ENTHUIPIG350013	OILED	ÉQUILIBRE	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35016 ENTHUIPIG130016 ENTHUIPIG350016	OILED	GRIS CLAIR	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35015 ENTHUIPIG130015 ENTHUIPIG350015	OILED	GRIS FLAMANT	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35009 ENTHUIPIG130009 ENTHUIPIG350009	OILED	GRIS TAUPE	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35003 ENTHUIPIG130003 ENTHUIPIG350003	OILED	INVISIBLE	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35010 ENTHUIPIG130010 ENTHUIPIG350010	OILED	NOIR	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35012 ENTHUIPIG130012 ENTHUIPIG350012	OILED	NOIR INTENSE	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35001 ENTHUIPIG130001 ENTHUIPIG350001	OILED	TRANSPARENT	350ML 1.3L 3.5L	58.90 160,00 385,00
ENTHUIPIG35002 ENTHUIPIG130002 ENTHUIPIG350002	OILED	VANILLE	350ML 1.3L 3.5L	58.90 160,00 385,00

SPECIFIC CLEANING



Degreaser spray is a product for removing grease stains on a surface treated with our oils. We recommend that you apply this product immediately after the stain appears, to prevent the grease from sticking to the floor. Degreaser Spray is also used to remove black marks left by the soles of shoes.

- Rdy to use
- Very concentrated

USER INSTRUCTIONS:

- Spray RMC Grease Remover Spray on a microfiber cloth and rub gently in circular motions, until the stain disappears.
- Once this operation is complete, clean with the Interior Soap Spray.

To remove stubborn stains, we recommend repeating this operation until the desired result is obtained.

Can be used on other surfaces. We advise you to do a preliminary test.
Do not dilute.

PACKAGING :

500 ML

DEGREASING SPRAY

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTSPRDEG500ML	DEGREASING SPRAY	500ML	20.40

REGULAR CLEANING



Concentrated interior soap is an ecological soap to be diluted in water, specially developed for the maintenance of surfaces treated with our oils.

This soap allows the characteristics of our oils to be preserved over time. Very effective also on other supports: varnished parquet, laminate, tiling, linoleum, kitchen, bathroom ...

USER INSTRUCTIONS:

- Dust the surface
- Dilute 3 capfuls of product in 3 liters of water. Never use pure
- Clean with a microfiber rinsed frequently with clean water. Then let dry without rinsing for about 15 minutes.

Do not leave water on the ground. Slightly humidify it the floor! Do not walk on the ground until it is completely dry.

Refill the spray: fill with water then add 1/2 capful of concentrated interior soap

A 500 ml bottle of concentrated interior soap represents approximately 150 refills for the ecopspray!

PACKAGING:

• 500 ML

CONCENTRATED SOAP

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTSAVCON500ML	CONCENTRATED SOAP	500ML TO DILUTE	15.70

REGULAR CLEANING



Interior soap spray is an ecological ready-to-use soap specially developed for the maintenance of surfaces treated with our oils.

This soap allows the characteristics of our oils to be preserved over time. Very effective also on other supports: varnished parquet, laminate, tiling, linoleum, kitchen, bathroom ...

USER INSTRUCTIONS:

- Dust the surface and spray directly on the surface to be cleaned.
- Clean with a microfiber rinsed frequently with clean water.
- No need to rinse, let dry for about 15 minutes

Do not leave water on the ground, just humidify it !

Do not walk on the ground until it is completely dry

Refill the spray , fill with water the add 1/2 capful of concentrated interior soap

PACKAGING:

• 500 ML

SPRAY SOAP

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTSAV500ML	SPRAY SOAP	500ML	13.10

REGENERATING MAINTENANCE

Refresh'eco revitalizes and restores silkiness to surfaces treated with oils. Restores shine to all oiled finishes, quick and easy to use. Colorless product suitable for all colors.



USER INSTRUCTIONS:

- Clean the surface perfectly with Interior Soap
- let dry
- Spray a small amount of Refresh'eco on the surface and distribute with a microfiber in the direction of the wood fibers
- Leave to dry for about an hour

Consumption: + / - 100 m²/ L

NB : apply before the color of the oil is gone. If the abrasion shows bare wood, reuse the original oil to repair the support before using Refresh'eco. The frequency of use depends on the use of the surface

• 500 ML

REFRESH'ÉCO

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTREFEC500ML	REFRESH'ÉCO	500ML	34.80

PROTECTIVE MAINTENANCE



Universal Metallizer is a maintenance over-oil used to reinforce the protection of oiled woods.

it is applicable to all oils on the market. Universal metallizer is recommended (applicable 24-36 hours after the protective oil has dried) for surfaces subject to heavy traffic, for damp rooms and workb surface.

This product is transparent, it does not change the color of the wood.

- Ready to use
- 0% of VOC !
- Does not contain water or solvents
- Applicable to all oils on the market
- Reinforces the protection of oiled surfaces
- Let the wood breath

USER INSTRUCTIONS :

- On a clean surface, distribute a small amount of Universal Metallizer
- Leave on for 5 minutes
- Wipe off any excess product
- Leave to dry for 12 hours

Productivity: 1 L = +/- 200 m²

PACKAGING:

- 500ML
- 5L

METALLIZING

REFERENCE	TYPE	CAPACITY	€/PIECE
ENTMETTRANS500ML	METALLIZING	500ML	64.20
ENTMETTRANS5000ML		5L	620.60

COMPRESSION STRIP

The compression strip must be used in carrying out the so-called «compression» installation. It is strongly recommended in other types of installation (glued).



- Roll of 5 linear meters
- Allows the skirting board to be installed before the floors
- Ensures the creation of sufficient expansion spaces at the edge of the room
- Avoid the uses of wedges
- Thickness 20mm

USER INSTRUCTIONS:

- Position the compression joint at the edge of the room against the walls.
- Position the skirting board on top, leaving the thickness of a business card between the gasket and the skirting board
- Install the parquet by compressing the joint

COMPRESSION STRIP

REFERENCE	TYPE	PACKAGING	€/PIECE
ACCJC5ML	INSTALLATION ACCESSORY	ROLL OF 5M LINEAR	21,00

EXPANSION STRIP



The expansion strip makes it possible to compensate for the dimensional variations of the wood in a bad controlled environment.

- Roll of 5 linear meter
- Ensures the creation of sufficient expansion space in the middle of the room
- Thickness 20mm

USER INSTRUCTIONS:

- Position the expansion joint between 2 rows of parquet slabs to compensate for dimensional variations in the wood in the event that humidity or temperature is not perfectly controlled.

COMPRESSION STRIPS

RÉFÉRENCE	TYPE	PACKAGING	€ HT PIÈCE
ACCJD5ML	ACCESSOIRE DE POSE	ROULEAU DE 5M LINÉAIRE	32,00

SIKA ADHESIVE CARTRIDGE 600



Flexible adhesive mono-component for gluing end-grain wood into blocks

- Mono-component, ready to use
- Polymerization quick and without bubbles
- Solvent free and odorless
- Without water, does not cause swelling of the parquet.

SIKA ADHESIVE CARTRIDGE 600ML

REFERENCE	TYPE	CAPACITY	€/PIECE
ACCSIKAADH600ML	INSTALLATION ACCESSORY	600ML	9.00

SPREADABLE SIKA ADHESIVE



One-component flexible adhesive for full gluing.

- Mono-component, ready to use
- Polymerization quick and without bubbles
- Solvent free and odorless
- Without water, does not cause swelling of the parquet

SPATULABLE SIKA ADHESIVE

REFERENCE	TYPE	CAPACITY	€/PIECE
ACCSIKAADSPAH6000	INSTALLATION ACCESSORY	BUCKET 4KG	32

MAGNET ADHESIVE BACKING



Adhesive backing for magnet installation

- Roll of 5 meter linear
- Used to receive slabs equipped with scratch pads
- Suitable for floor or wall installation

USER INSTRUCTIONS

- Position the magnetic adhesive backing on the floor or wall.
- Smooth out to obtain a perfectly flat surface and avoid trapping air bubbles
- Apply the coating provided with the magnet pads

MAGNETIC BACKING

REFERENCE	TYPE	PACKAGING	€/LINEAR METERS
ACCSCRML	INSTALLATION ACCESSORY	AUTO ADHESIVE ROLL	20.00

SOLID OAK SKIRTING BOARD



Solid Oak Skirting board 70x20mm

- Thickness 2cm
- Unfinished or oiled
- **Several colors on request**

SOLID OAK SKIRTING BOARD

REFERENCE	TYPE	PACKAGING	€/LINEAR METERS
ACCPLCHMSST	INSTALLATION ACCESSORY	ML	17.80

DOOR THRESHOLD



- Door threshold T-profile
- Massif du Chêne
- Raw or oiled finish
- Several colors on requestmande

DOOR STEP

REFERENCE	TYPE	PACKAGING	€/LINEAR METERS
ACCSDPCHT	INSTALLATION ACCESSORY	ML	8.40

FIDBOX SENSOR



Humidity and temperature sensor, data viewable on smartphone

- Monitoring and recording of temperature and humidity variations
- Long-term follow-up and diagnosis.
- Help and assistance in problem solving.
- Recording of non-modifiable data.

Can be used for all types of wood coverings.

USER INSTRUCTIONS:

- Download the application from the Apple store or the Android shop.
- Register by entering a username and password (3 characters minimum). Complete the requested fields.
- Touch the + sign to add the Fidbox sensor
- Enter the sensor serial number (the last 6 characters on the back of the sensor) and the measurement zone (living room, bedroom, kitchen, etc.)
- Choose the synchronization time you want, you can communicate with the sensor for a period of 2 hours from the chosen time

FIDBOX SENSOR

REFERENCE	TYPE	PACKAGING	€/PIECE
ACCFIDBOX	SENSOR RH AND T	UNIT	190,00

HMBOX SENSOR




Digital measuring instrument that tracks the evolution of humidity inside building materials such as screed or basement.

- A simple tool for remote measurement of screed and part conditions
- Cost reduction: Avoids expense and unnecessary visits to the installation site
- Predict the perfect time to install the flooring
- The data is accessible for different users from a simple internet browser or smartphone

HMBOX SENSOR

REFERENCE	TYPE	PACKAGING	€/PIECE
ACCHMBOX	CHAPE SENSOR	UNIT	599,00

S A M

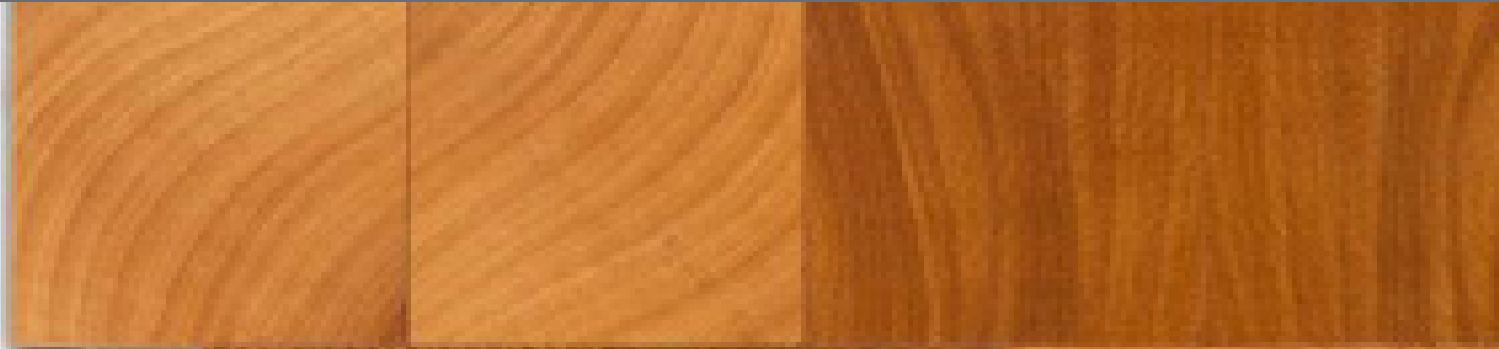

P L E S





GRAIN FLOORS COLOR
SWATCH
16,66€ PIECE



END-GRAIN FLOOR SPECIES
SWATCH 16,66€ PIECE



ENGINEERED SWATCH
12,50€ PIECE



LVT SWATCH
10€ PIECE



PRESTIGE BOX END-GRAIN
FLOOR COLOR
33,33€ PIECE



PRESTIGE BOX END-GRAIN
FLOOR
29,16€ PIECE



END-GRAIN FLOOR BOX
37,50€ PIECE



WALL COVERING BOX
37,50€ PIECE



FITTING DISPLAY
50,00€ PIECE



ND-GRAIN FLOOR DISPLAY
299,00€ PIECE



ENGINEERED DISPLAY
170,00€ PIECE



LVT DISPLAY
149,00€ PIECE



SAMPLES PACK
149.16€

W W W . D R A K K A R B O I S . C O M

